

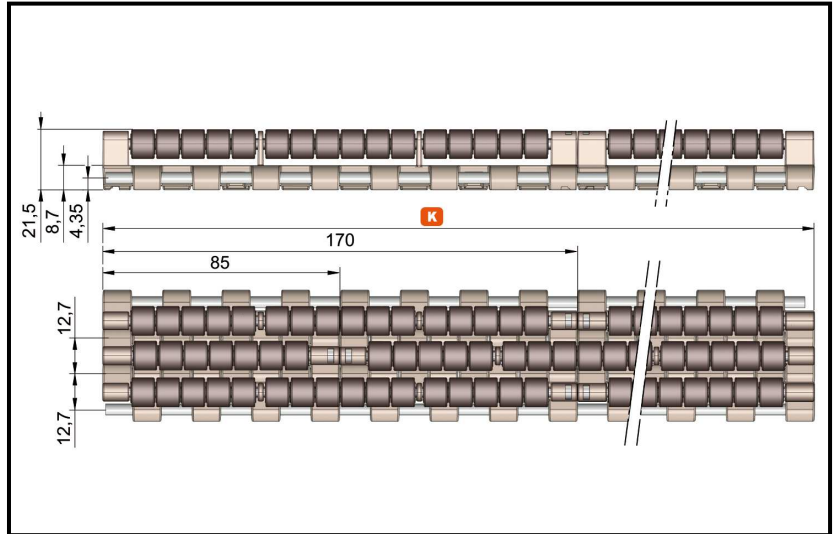


SERIE 9123BP

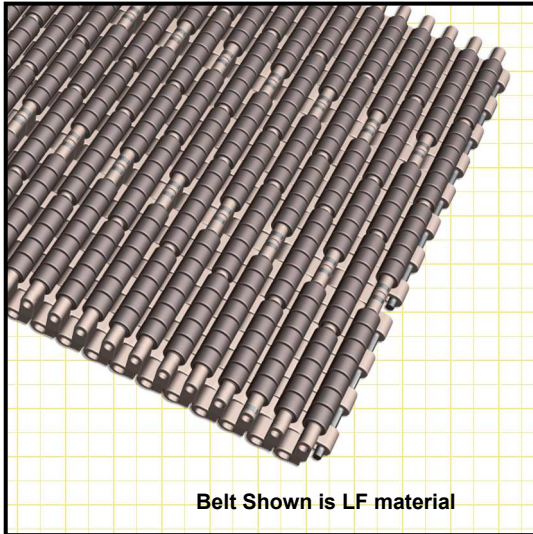

COD.	K		Kg/m ² ACETAL (LF)	Open Surface	*Ri (mm)	Ømin. (mm)
	mm	inch				
** 9123BP01	85	3,346	12,16	0%	-	73,8
** 9123BP02	170	6,692				
** 9123BP03	255	10,039				
** 9123BP04	340	13,385				
.....						
** 9123BP19	1615	63,582				
** 9123BP20	1700	66,929				

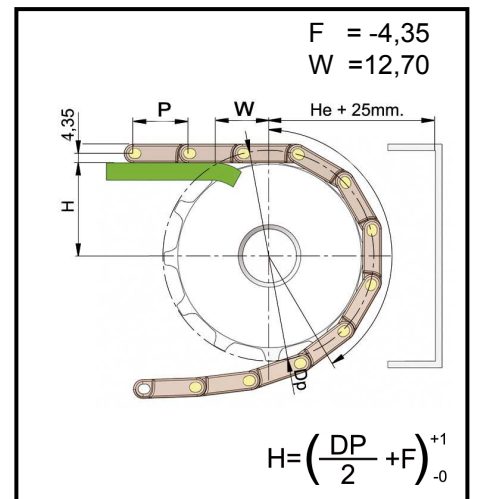


* Ri: Back-flex Radius

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N/m	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	4	PP	+5	+85	+70	12500	✓

Z	Ø De	Ø Dp	He
16	66	65,1	36,9
20	82,5	81,2	44,9
28	115	113,4	61,05
30	123	121,5	65,1
32	131	129,6	69,15
36	147	145,7	77,2
38	155	153,8	81,3
42	171	170,0	89,3

Available types

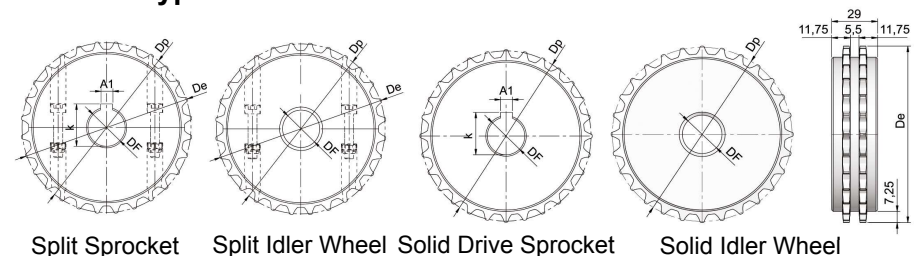

Remarks

- LF Standard Production
- Other materials available under request
- Nominal sizes & weights are according to acetal raw material, and may vary for the rest of raw materials used