



SERIE 8257

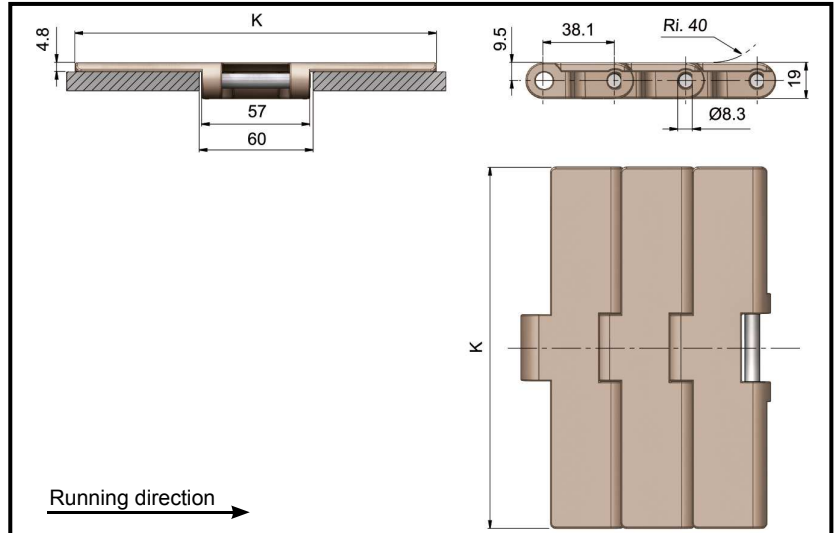

COD.	K		Kg/m	Open Surface	RM (mm)	*Ri (mm)
	mm	inch				
** 8257 075	190,5	7,50	2,47	0%	-	40
** 8257 100	254,0	10,00	2,86			
** 8257 120	304,8	12,00	3,18			

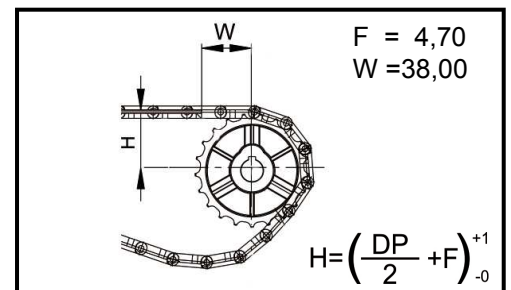


* Ri: Back-flex Radius


** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	8,3	SS304	-40	+85	+70	3900	✓
KV ●	Acetal-Kevlar	Grey				-			

Available types

Z	Ø De	Ø Dp
12	148,5	147,2




Split Sprocket




Split Idler Wheel




Z	Ø De	Ø Dp
9	112,5	111,4
10	124,9	123,4
11	136,4	135,2
12	148,5	147,2




Split Drive Sprocket



Solid Sprocket



Solid Idler Wheel



Remarks

- Standard packaging 3,048m 10ft.
- ● Made to order
- LF Standard Production
- Other materials available under request