
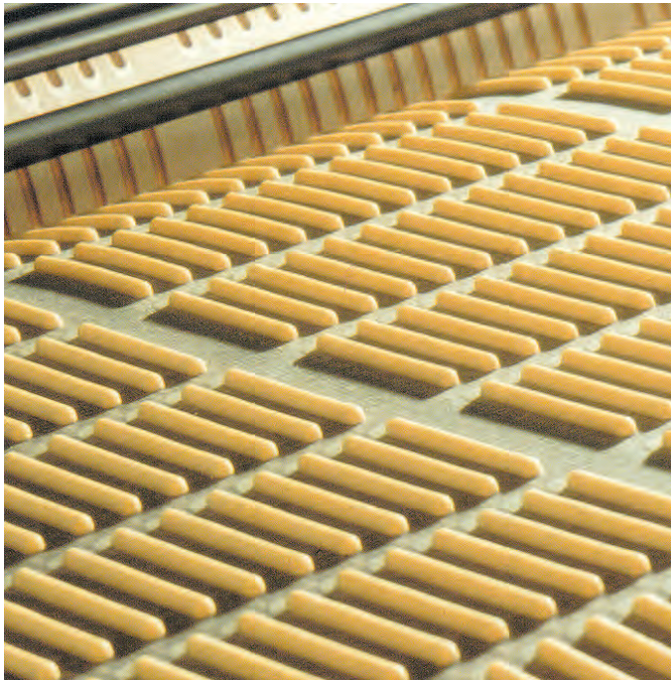
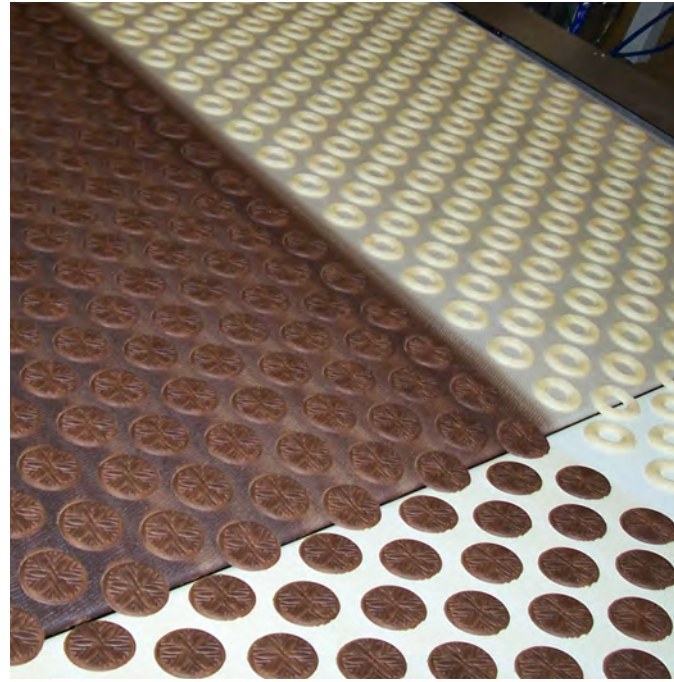


AmDough

Endless Woven Belts for Biscuit Bakeries

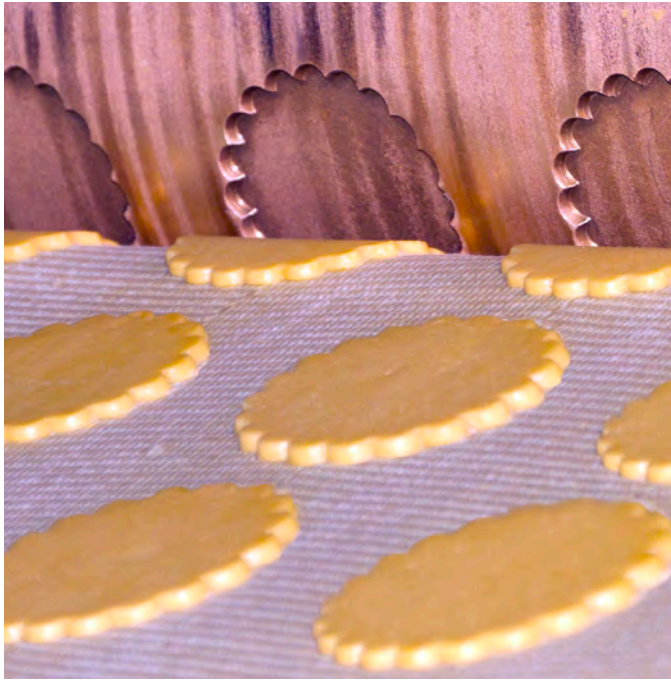

Learn more about our innovations

Ammeraal Beltech knows about industrial bakeries. When the company was founded in 1950, the first belt ever produced was an Endless Woven bakery belt. Since then, we have been gathering experience and expanding our knowledge, and all of this benefits our customers.

Ammeraal Beltech is a major supplier to the food industry in general and to biscuit bakeries in particular.

The biscuit bakery industry requires high-performance and long-lasting dough handling belts. Ammeraal Beltech is a reliable supplier of both.

One basic demand in bakeries is that the dough should not stick to the conveyor or process belt. Two methods of dough forming are an exception:

- Rotary moulder
- Rotary cutter

Bakery production


Extraction process



Dough is pressed into a rotating moulder drum that forms the shape of the biscuits.

- The belt is squeezed between the moulding and pressure drums.
- Then the belt releases, creating a suction effect at the same time.
- Moisture and fat from the dough are absorbed into the belt so that the moulded dough sticks to the belt.
- The formed dough then travels with the belt and is extracted from the moulding drum.

Cutting process

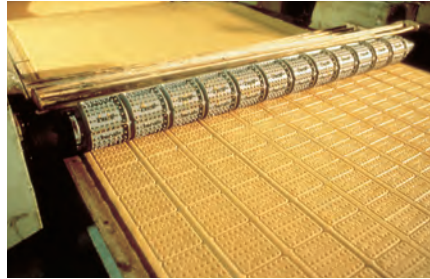

A rotating cutter (or knife) cuts the biscuit shape into the layer of dough.

- The layer of dough is transported over the belt.
- As the dough passes the cutting drum, the biscuit form is cut out and pressed onto the belt.
- The remaining dough around the biscuits is guided onto a separate scrap conveyor belt for re-use.
- The biscuit forms are then transferred to the oven feeding belt.

Release process



At the end of both processes, the belt is pulled over a knife edge.

- Moisture and fat are forced to the top surface of the belt, thus forming a film.
- This effect, combined with the sharp bending and stretching of the belt over the knife edge, releases the fragile biscuit dough from the belt surface so that it can continue to the oven.

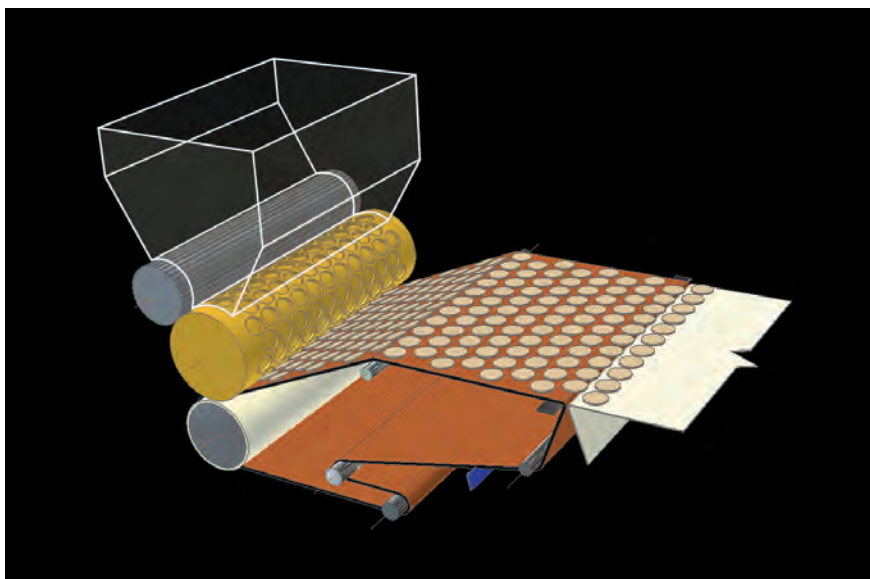


Diagram of a rotary moulder



Ammeraal Beltech
member European
Hygienic Engineering
& Design Group

How to select AmDough Endless Woven Belts

The extraction and release characteristics are determined by three main factors:

1. Absorption capacity

This is determined by the content and combination of materials: cotton, flax, polyamide and polyester. Cotton and flax can absorb 20 to 25% of moisture, polyamide 4% and polyester 0.4%.

The belt with the highest absorption capacity is the AmDough 100.

Maximum extraction performance from the moulder drum requires a high absorption factor, and best release characteristics on the knife edge transfer call for a low absorption factor. This means that an ideal balance is needed to achieve both good extraction and good release. When different dough types are processed on the same line, one of the two universal AmDough Belt types can be used.

2. Weave pattern

The pattern and amount of air between dough and belt influence the dough release. Plain and twill weave have a more open surface than broken twill. The weave type to be applied depends on the composition and shape of the dough.

3. Belt thickness

A thinner belt can run over the smallest knife edge and follow its shape very closely to allow for good release of the thinnest products.



Broken twill weave GK
Equally spaced air pockets



Twill weave K
Air grooves in herringbone pattern



Plain weave P
Lateral air grooves

Standard product range

Belt type	Material	Weave	Belt thickness	Diameter of knife edge < 135°	Article code	
AmDough 100	cotton	broken twill	2.8 mm	5 mm	GK 1283B	
AmDough 90	cotton	broken twill	2.4 mm	4 mm	GK 0983B	
AmDough 80	cotton/ polyamide	broken twill	2.4 mm	4 mm	GK 8484BP	
AmDough 70	cotton	plain	2.0 mm	3 mm	P 1284B	
AmDough 60	cotton/ polyamide	broken twill	2.4 mm	4 mm	GK 0983BP	universal type
AmDough 50	cotton/ polyamide	plain	1.8 mm	3 mm	P 8484BP	universal type
AmDough 40	cotton/ polyamide	plain	2.0 mm	3 mm	P 1284BP	
AmDough 20	cotton/ polyester	plain	2.0 mm	3 mm	P 4060BE	

There is a linear relationship between the AmDough absorption numbers:


Heavy dough • wet • high degree of moisture • AmDough Belt with higher absorption factor
Light dough • dry • low degree of moisture • AmDough Belt with lower absorption factor

Top side: always uncoated
Bottomside: PUR transparent food grade impregnation for stability, better wear resistance and longer belt life
Belt edges: reinforced polyamide selvages
Dimension: length up to 100 m, width up to 3400 mm

Broken twill types (GK) are also available as Twill (K) versions.


Why choose an Endless Woven AmDough Belt?

- **Less headache, better yield and longer life**

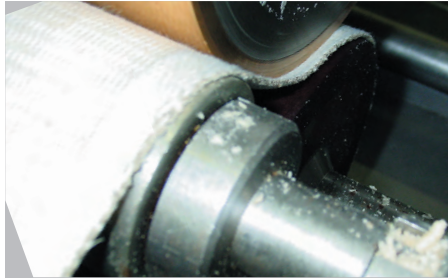


AmDough Belts are manufactured to high quality standards. The bottom side is impregnated with wear resistant PU to maintain the belt shape and to prevent narrowing. Cord yarns are used to increase wear resistance, and polyamide to reinforce the selvages. Strong flax yarns in the weft ensure lateral stability. As a result, their extended belt life and continuous absorption capacity make the Endless Woven AmDough Belts very cost-effective.

- **Trouble-free dough processing**

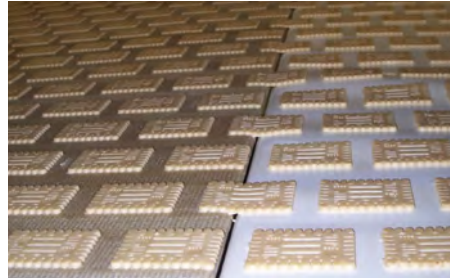

The main benefit of Endless Woven AmDough Belts is the absence of a splice or seam, thus ensuring continuous absorption and smooth product transfer. Scrapers can easily remove remnant dough without damaging the belt.

- **Consistent product quality**

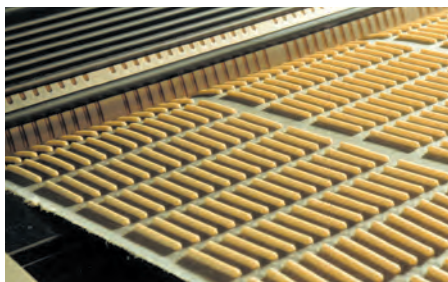

AmDough Belts have consistent extraction and release properties. Biscuit tails are limited to a minimum because low drum pressure is required to get optimum demoulding. These characteristics ensure smooth biscuit transfer without any interruption or deformation of the formed dough.

- **The optimum solution for every dough type**



Endless Woven AmDough Belts are suitable for all biscuit dough types. Their components are safe and transmit no colour, taste or smell to the biscuit products. The absence of antistatic fibres means that the belts can be used in combination with metal detectors.

Local Contacts

... and 150 more service contact points
at ammeraalbeltech.com/au

VICTORIA - Head Office & Administration

51 Bazalgette Crescent
Dandenong South VIC 3175
Ph (03) 8780 6000
salesvic@rydell.com.au

QUEENSLAND - Modular Division

8 Machinery Street
Darra QLD 4076
Ph (07) 3564 4600
salesqld@rydell.com.au

VIC - HASTINGS

Factory 16/24 Kanowna Street
Hastings VIC 3915
Ph (03) 5979 4447
salesvic@rydell.com.au

NEW SOUTH WALES

22 Binney Road
Kings Park NSW 2148
Ph (02) 8664 9800
salesnsw@rydell.com.au

SOUTH AUSTRALIA

17-19 Churchill Road North
Dry Creek SA 5094
Ph (08) 8216 7000
salessa@rydell.com.au

NEW SOUTH WALES

New England/North West Region
43 Macleay Way
Invergowrie NSW 2350
Ph 0418 513 998
salesnsw@rydell.com.au

QUEENSLAND

12 Machinery Street
Darra QLD 4076
Ph (07) 3564 4600
salesqld@rydell.com.au

WESTERN AUSTRALIA

29 Irvine Drive
Malaga WA 6090
Ph (08) 9249 3777
saleswa@rydell.com.au

VIC - BAIRNSDALE

Factory 3/79 Macleod Street
Bairnsdale VIC 3875
Ph 0487 555 118
salesvic@rydell.com.au

**Expert advice, quality solutions
and local service
for all your belting needs**



45+ years servicing Australia | 10 sales & services centres | Australia's One-Stop Belt Shop

General contact information:

Ammeraal Beltech
P.O. Box 38
1700 AA Heerhugowaard
The Netherlands

T +31 (0)72 575 1212
info@ammeraalbeltech.com

ammera.com